

2/0 AWG

GBC004
GBC005



GBC004
24"

GBC005
72"

COMMERCIAL-GRADE JUMP STARTS. BOOST MAX™ BATTERY CLAMPS.

COMPATIBLE WITH:

GB500+



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

SECURELY CONNECT. HIGHLY-CONDUCTIVE CAMLOCKS.

GBC004 and GBC005 Boost MAX™ Battery Clamps are compatible with the camlock connectors on Boost MAX GB500+.

2/0 AWG SILICONE WIRE.
POWERFUL CURRENT TRANSFER.


MULTI-LAYERED TEETH.
FOR IMPROVED TERMINAL CONTACT.

MAXIMUM CONDUCTIVITY.

Designed to efficiently transfer maximum current flow with minimal power loss. Made from durable, heat stabilized 2/0 AWG silicone wire that maintains its flexibility in cold weather environments. Multi-layered clamp teeth allow for more contact points to be on the battery terminal's surface.


REACH AND CONNECT.

The 72-inch (182cm) reach of the GBC005 clamps allows for ease of use, for situations when carrying the GB500+ is not convenient.

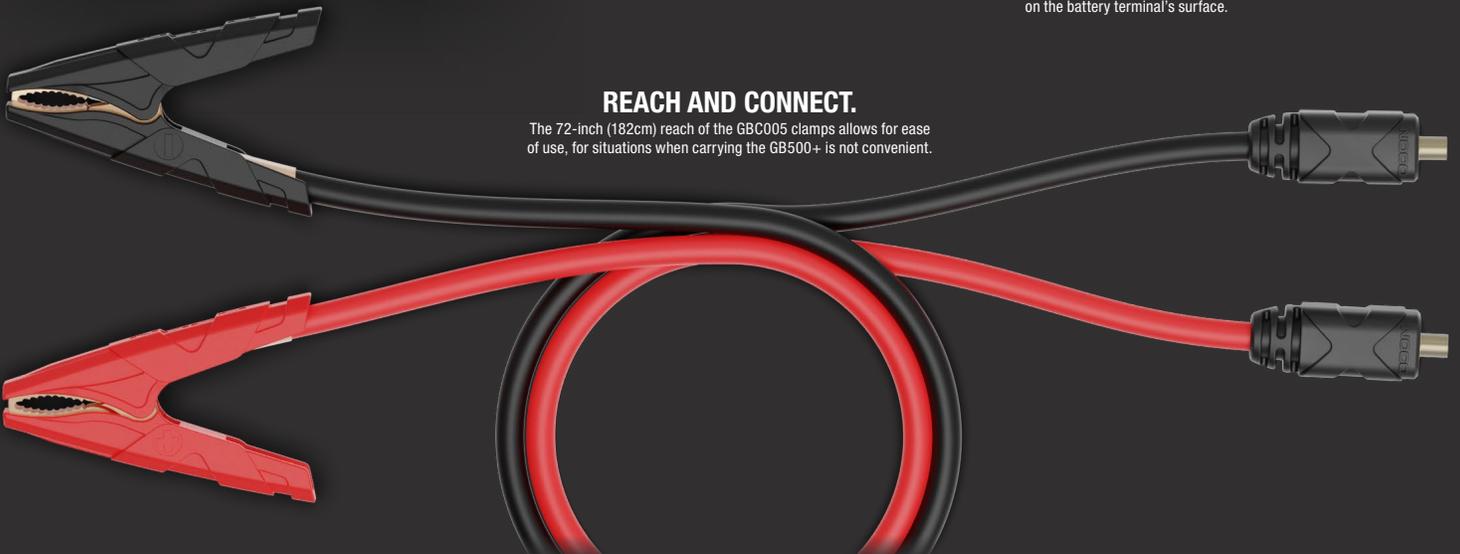


DIMENSIONS.

GBC004

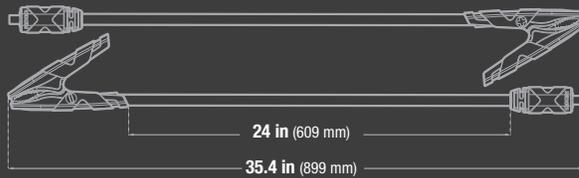

GBC005

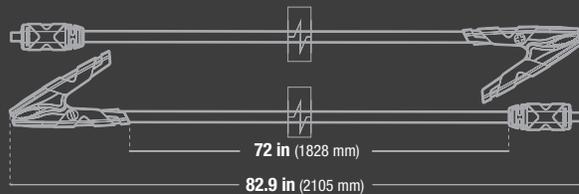

TECHNICAL SPECIFICATIONS

COMPATIBILITY: BOOST MAX GB500+

GBC004 WEIGHT: 5.51 lbs (2.49kg)

GBC005 WEIGHT: 7.41 lbs (3.36kg)

INPUT: Boost Female Connector

VOLUMETRICS:	GBC004	GBC005
Inner Carton:	Inner Carton:	Inner Carton:
Dimensions:	Dimensions:	Dimensions:
15.28"x12.52"x2.76"	3.35"x10.04"x11.61"	3.35"x10.04"x11.61"
Weight: 5.95 lbs	Weight: 10.65 lbs	Weight: 10.65 lbs
UPC: 0-46221-18006-0	UPC: 0-46221-16017-8	UPC: 0-46221-16017-8
Master Carton:	Master Carton:	Master Carton:
Dimensions:	Dimensions:	Dimensions:
15.3"x12.5"x15.0"	13.98"x10.83"x12.40"	13.98"x10.83"x12.40"
Weight: 31.97 lbs	Weight: 53.25 lbs	Weight: 53.25 lbs
Quantity: 5	Quantity: 5	Quantity: 5
UCC: 20046221180064	UCC: 20046221190018	UCC: 20046221190018
Units Per Pallet:	Units Per Pallet:	Units Per Pallet:
225 Units	225 Units	300 Units

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co