

16 AWG

GC017



POWER 12 VOLT DEVICES. 12 VOLT PLUG WITH BATTERY CLAMPS.

12V INSTANT 12V OUT.

Riding your motorcycle and need to power a tire pump or other 12V devices? Turn any 12V battery into an auxiliary 12V port quickly and easily. Attach to the battery terminals to add a 12V port to vehicles like motorcycles and ATVs.

15A HIGH CONDUCTIVITY.

Made from a high-conductivity 16AWG 100-percent copper wire and a rated capacity of 15-amperes.

MADE TOUGH INTEGRATED FUSE. STRAIN RELIEF.

A water-resistant cap protects the female adapter plug socket from the elements. Integrated in-line fuse for added safety. Built-in over-molded strain reliefs. All-copper heavy gauge wire.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

BATTERY TO 12V OUT.

WITH DUAL PURPOSE CLAMPS.

Connect GC017 12-Volt Adapter Plug Socket with Battery Clamps directly to your battery to create a 12V port anywhere. Riding your motorcycle or just need another 12-volt port outside the car? Attach to the battery with the micro clamps for temporary connections or permanently mount the eyelets to the battery.

IMPROVED CLAMPS.

Secure fit on battery terminals.

20A MICRO BLADE FUSE.

Built-in 20A fuse protection for increased safety. The 20A fuse provides equal protection while being 45% smaller than the previous NOCO 10A Fuse.


M6
EYELETS

RUGGED.

Watertight connector cap.

THE ALL NEW NOCO 20A FUSE
NEXT TO THE PREVIOUS NOCO 10A FUSE.

WHAT'S IN THE BOX

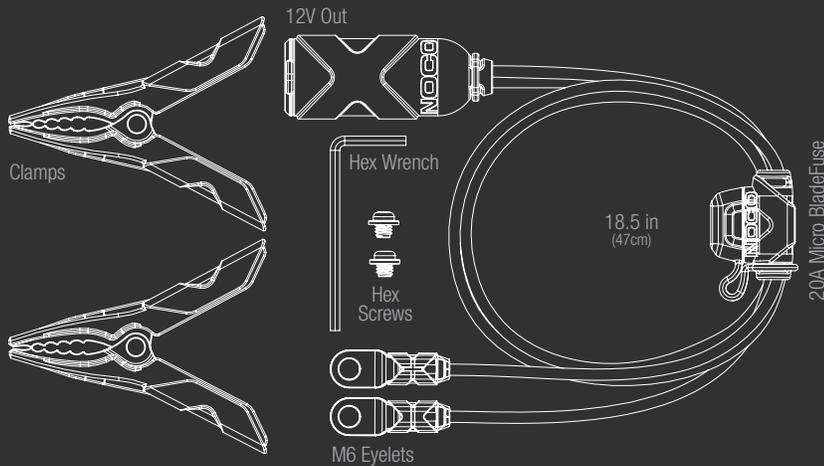

TECHNICAL SPECIFICATIONS

| | | |
|---------------|--|---|
| WIRE SIZE: | 16 AWG | |
| INPUT: | Battery Micro Clamps | |
| FUSE: | 20 Amp Micro Blade Fuse | |
| CABLE LENGTH: | 18.5 in (47cm) | |
| WEIGHT: | 0.36 lbs (0.16kg) | |
| VOLUMETRICS: | Retail Packaging: Dimensions: 2.7" x 2.3" x 7.0" Weight: 0.44 lbs UPC: 0-46221-13084-3 | Master Carton: Dimensions: 7.6" x 8.6 x 6.9" Weight: 3.6 lbs Quantity: 6 UCC: 20046221130847 |
| | Inner Carton: Dimensions: 7.3" x 2.6" x 3.0" Weight: 0.53 lbs | Units Per Pallet: 960 Units |

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co